

# MK04

## COMPACT MOTORS



T E C H N I C A L C A T A L O G



**Methodology :**

This document is intended for manufacturers of machines that incorporate Poclain Hydraulics products. It describes the technical characteristics of Poclain Hydraulics products and specifies installation conditions that will ensure optimum operation. This document includes important comments concerning safety. They are indicated in the following way:



**Safety comment.**

This document also includes essential operating instructions for the product and general information. These are indicated in the following way:



**Essential instructions.**



**General information .**



**Information on the model number.**



**Weight of component without oil.**



**Volume of oil.**



**Units.**



**Tightening torque.**



**Screws.**



**Information intended for Poclain-Hydraulics personnel.**

The views in this document are created using metric standards.  
The dimensional data is given in mm and in inches (inches are given in brackets in italic)





# CONTENT

**MODEL CODE** **5**

Model code


**CHARACTERISTICS** **6**

Dimensions for standard 1-displacement motor	6
Load curves	7
Chassis mounting	8
Hydraulic connections	8
Immobilisator	9

Characteristics

**OPTIONS** **10**

Options

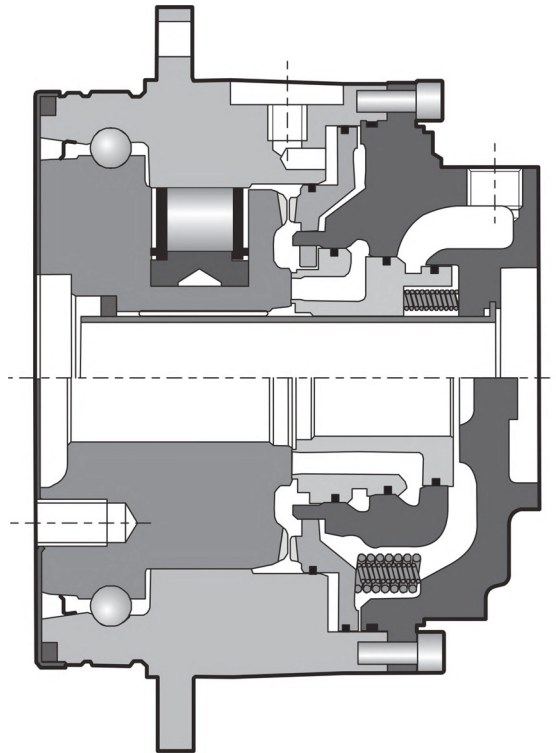


C	① cm <sup>3</sup> /rev [cu.in./rev.]	Theoretical torque		Max.power ① kW [HP]	Max. speed ① rev/min	Max. pressure ① bar [PSI]
		at 100 bar Nm	at 1000 PSI [lb.ft]			
8	272 [16,6]	432	[220]	18 [24]	120	400 [5 800]
0	340 [20,7]	541	[275]		110	
2	408 [24,9]	649	[330]		100	

① First displacement




# MODEL CODE

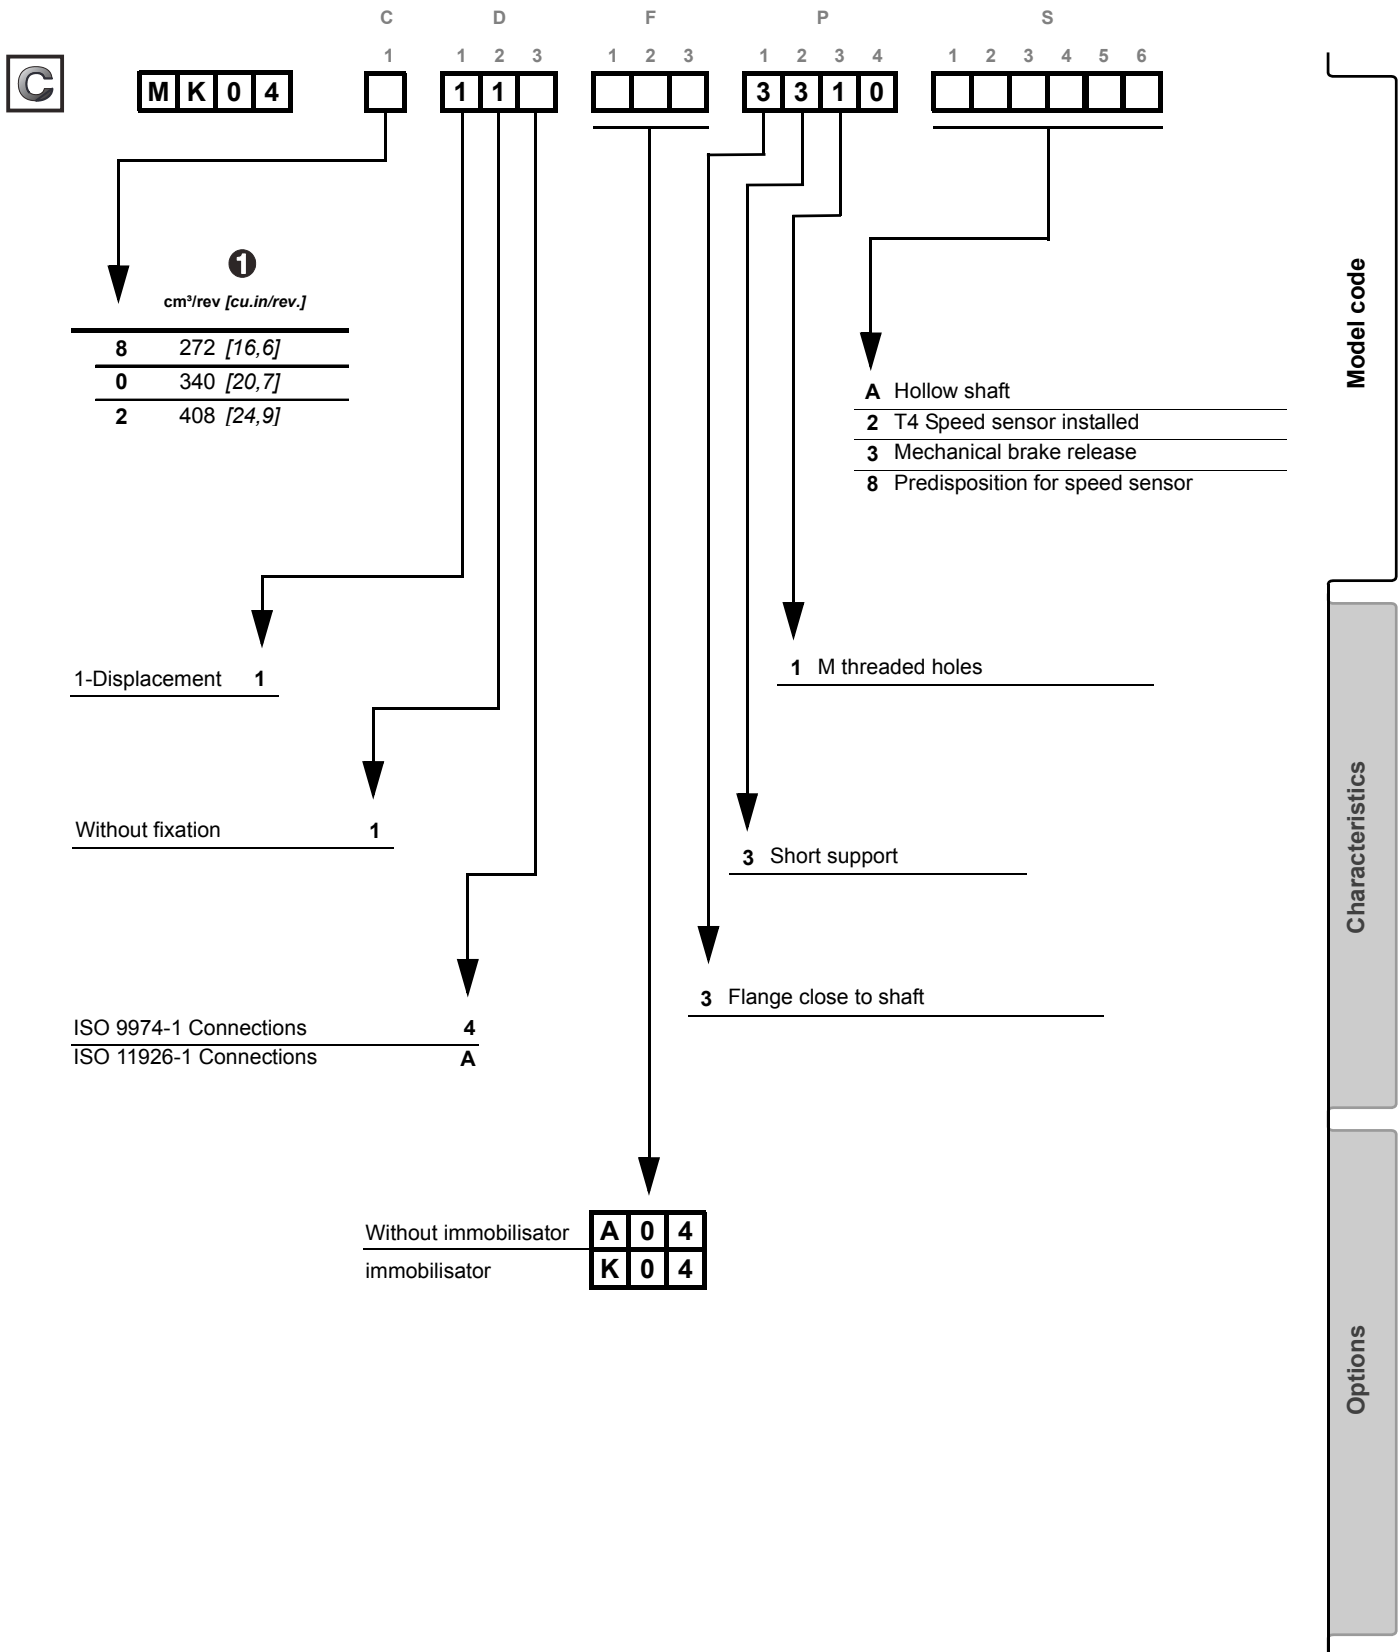





# CHARACTERISTICS



## Dimensions for standard 1-displacement motor

	30 kg [66 lb]	31 kg [68 lb]
	0,35 L [21 cu.in]	0,35 L [21 cu.in]

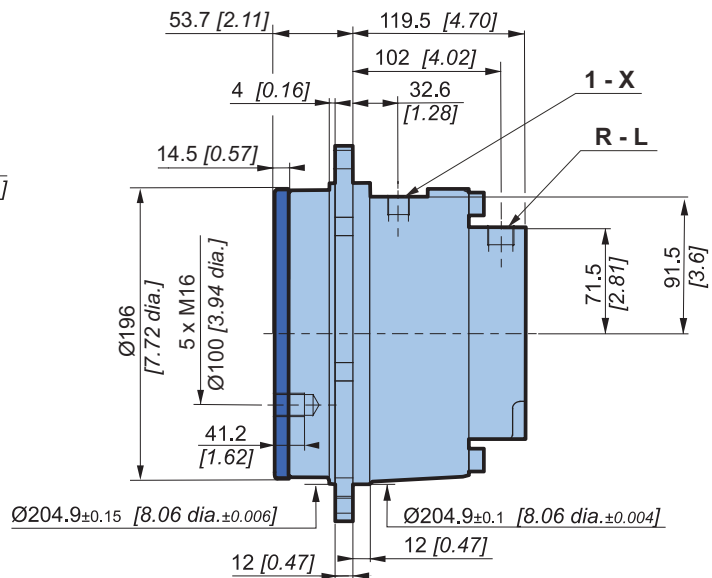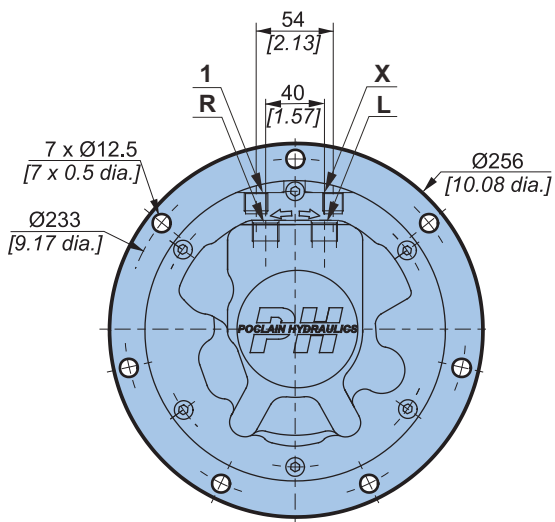

## Rotating retaining screws

	Classe	N.m		[lb.ft]
5 x M16 x 2	12,9	355		[262]

(\*) The tightening torques are given for the indicated loads.




**Load curves**

**Permissible radial loads**

Test conditions :

**Static** : 0 rev/min 0 bar [0 PSI]

**Dynamic** : 0 rev/min, code 2 displacement, without axial load at max. torque





**Service life of bearings**

Test conditions :


**L** : Millions B10 revolutions at 150 bars (average pressure), with 25 cSt fluid, code 0 displacement, without axial load.

**3 3 1 0**  
1 2 3 4  
P

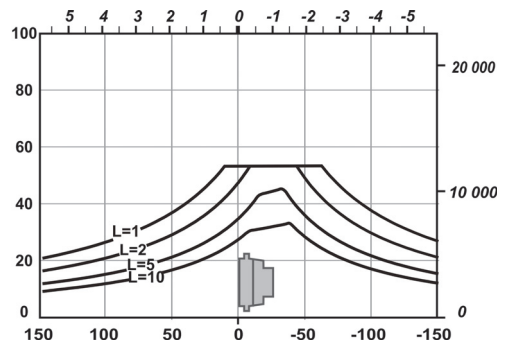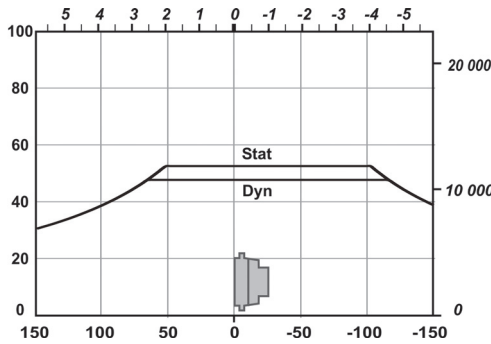

The service life of the components is influenced by the pressure. You must check that the combination of forces applied (Axial load / Radial load) is compatible with the permissible loads for the components, and that the resulting service lives of these components complies with the application's specifications. For an accurate calculation, consult your Poclain Hydraulics application engineer.



**Load**





**Efficiency**

**Overall efficiency**

Average values given for guidance for code 2 displacement after 100 hours of operation with HV46 hydraulic fluid at 50°C [122°F].



**Actual output torque**

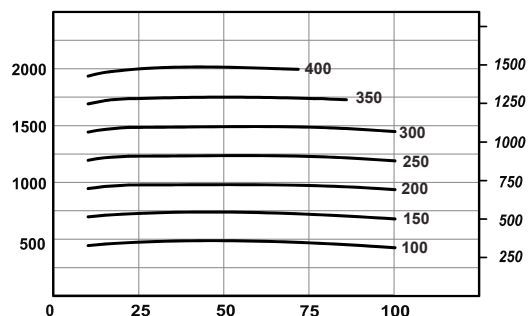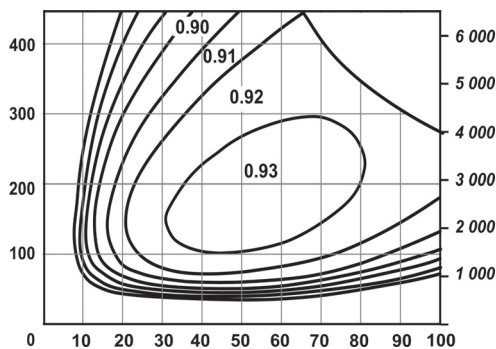

For a precise calculation, consult your Poclain Hydraulics application engineer.


Model code

Characteristics

Options



### Chassis mounting


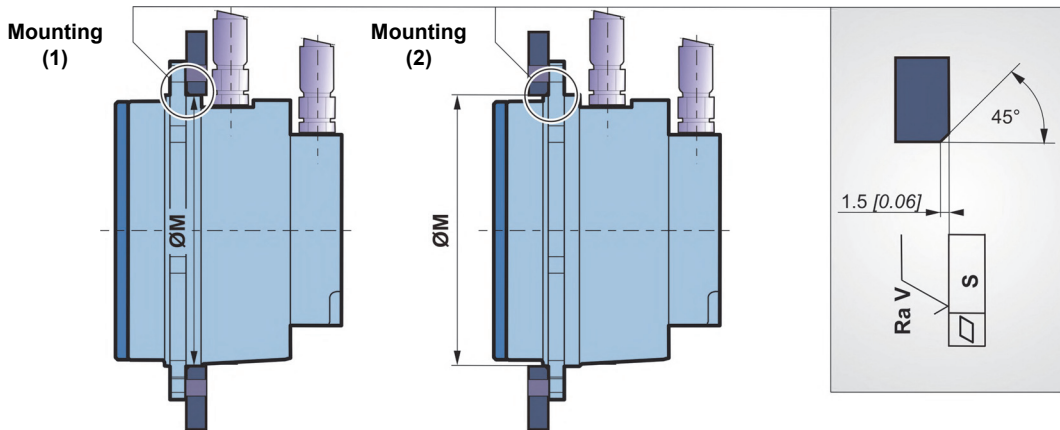


Take care over the immediate environment of the connections.

$\varnothing M$ (1)(2) mm [in]	S mm [in]	Ra V $\mu m$ [ $\mu in$ ]	7 x M12 x 1.75	Class of screw 12,9	N.m [lb.ft]
204,9 [8,07]	0,2 [0,01]	12,5 [0,49]			145 [107]

- (1) + 0.3 [+0.012]  
+ 0.2 [+0.008]
- (2) + 0.4 [+0.016]  
+ 0.3 [+0.012]

### Hydraulic connections

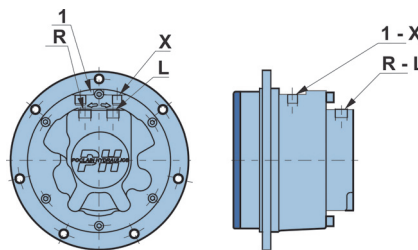

	Old standards	Standards	Power supply R,L	Drainage 1	Control of brake X
A	SAEJ514	ISO 11 926-1	3/4" - 16 UNF	9/16" - 18 UNF	1/2" - 20 UNF
4	DIN 3 852 NFE 48 050	ISO 9 974-1	M22 x 1.5	M16 x 1.5	M14 x 1.5



Do not put either a check valve or a poppet valve on the pilot lines (parking brake and displacement change) between the charge pump and the pilot valve. Do not use a piloting valve with integrated check valve.






To find the connections' tightening torques, see the brochure "Installation guide" N° 801478197L.



You are strongly advised to use the fluids specified in brochure "Installation guide" N° 801478197L.

**Immobilisator**

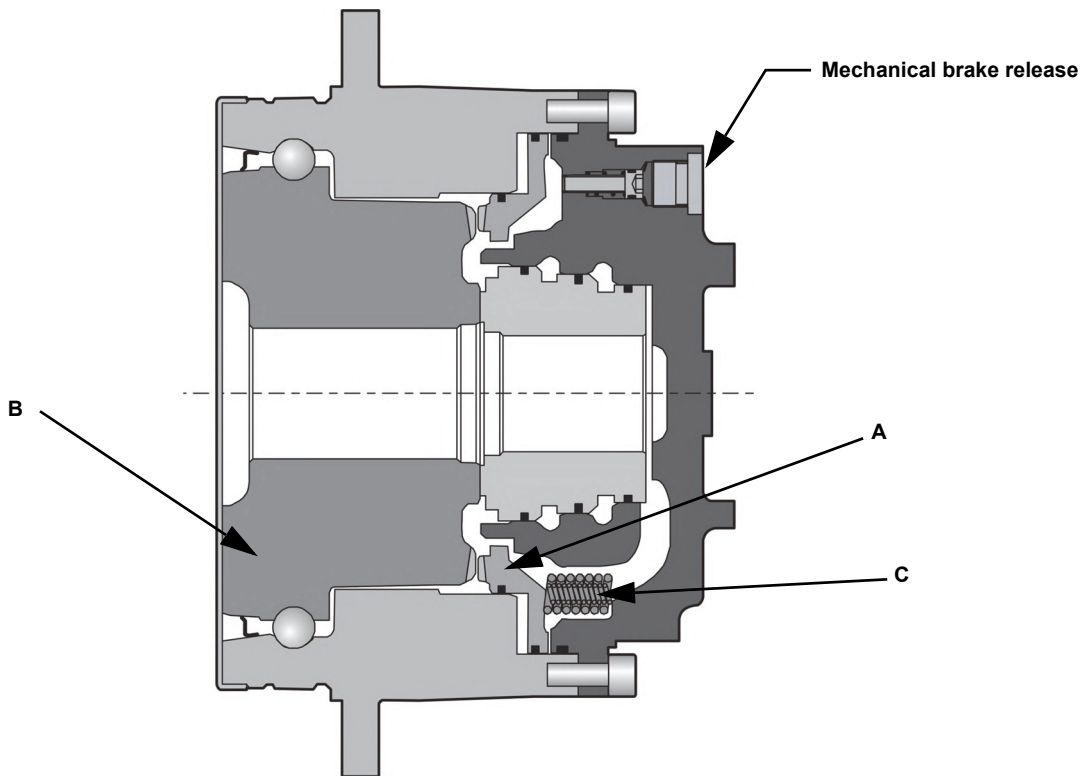

**Principle:**

This static brake consists of two toothed parts, one mobile (A), and the other fixed (B). When stationary, with no pressure, a spring (C) pushes the mobile part to mesh with the teeth of the cylinder block to immobilise it.

Parking brake torque with 0 bars in the housing (new brake)	3 170 Nm [2 338 lb.ft]
Minimum brake release pressure	17 bar [246,6 PSI]
Maximum brake release pressure	30 bar [435,1 PSI]
Capacity	23 cm <sup>3</sup> [1,4 cu.in]
Brake release capacity	14 cm <sup>3</sup> [0,8 cu.in]


Model code

Characteristics

Options



# OPTIONS



You can accumulate more than one optional part. Consult your Poclair Hydraulics sales engineer.

## 2 - 8 - Installed speed sensor or predisposition

### Designation



T4 Speed sensor installed

Predisposition for speed sensor



2

8

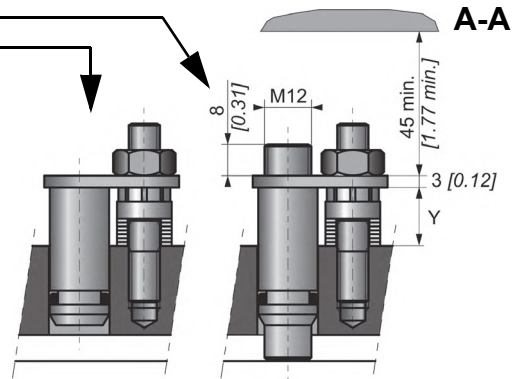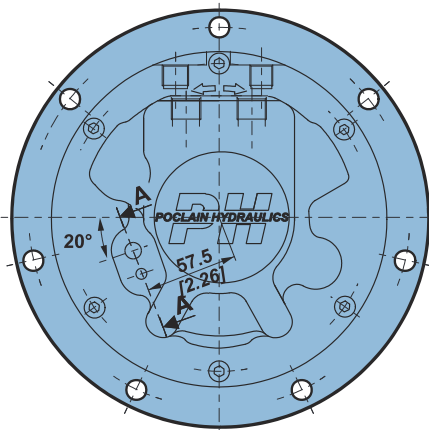

Max. length Y= 12.5

Standard number of pulses per revolution= 64




Look at the "Mobile Electronic" N° A01889D technical catalogue for the sensor specifications and its connection.



To install the sensor, see the "Installation guide" brochure No. 801478197L.




3 - Mechanical brake-release

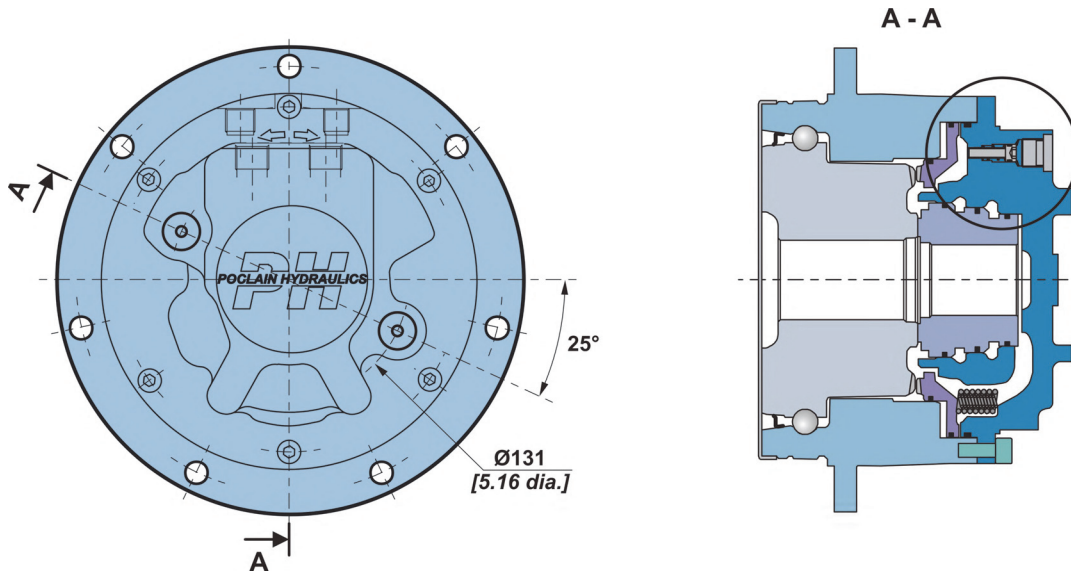



Refer to the "Installation guide" catalogue, N° 801478197L.

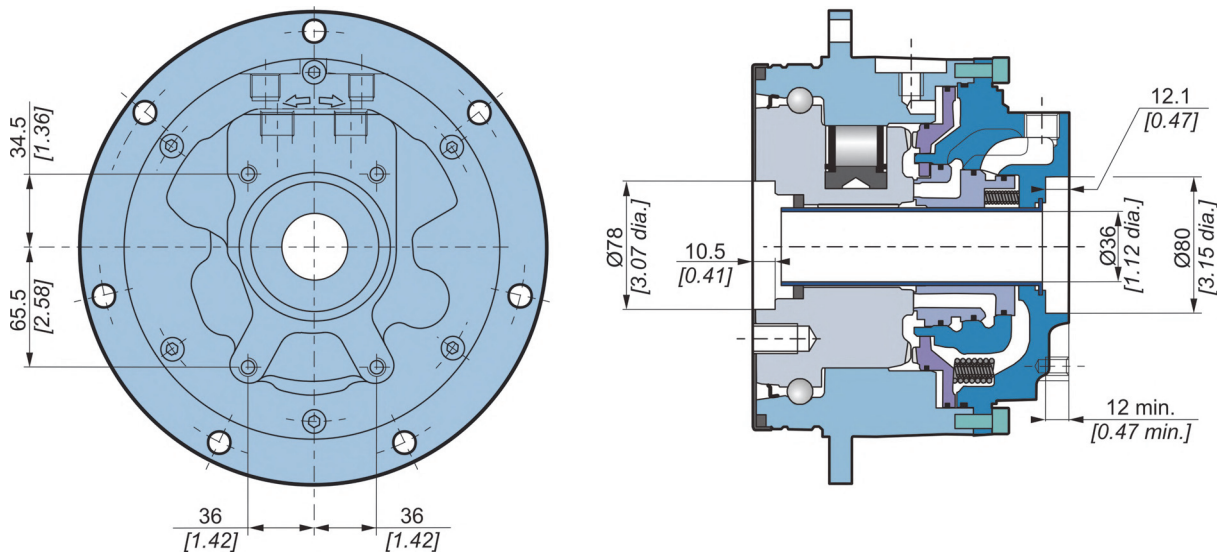A - Hollow shaft



Mounting bolt for high speed motor

	Classe	N.m	 [lb.ft]
4 x M8 x 1.25	10.9	295	[218]

(\*) The tightening torques are given for the indicated loads.

Model code

Characteristics

Options



*Poclain Hydraulics reserves the right to make any modifications it deems necessary to the products described in this document without prior notification. The information contained in this document must be confirmed by Poclain Hydraulics before any order is submitted.*

*Illustrations are not binding.*

*The Poclain Hydraulics brand is the property of Poclain Hydraulics S.A.*

-  04/02/2020
-  801 578 135P
-  801 578 146B
-  801 578 157N
-  801 578 168A
-  801 578 179M
-  A51812S
- 
- 

